

# SHOWA 720R

Full nitrile coating, with extra nitrile coating on the hand over polyester/nylon liner

## BENEFITS


- A fine, supple glove (1,10mm thick)
- Rough finish offering high chemical resistance and excellent resistance to abrasion
- Nitrile protects the hand from oils, hydrocarbons and grease penetration
- Optimized grip for tasks that require manual exertion and complete control over tools
- A light, elastic low-lint glove, resistant to deformation
- Seamless knit designed to prevent irritation

## FEATURES

- Dipped nitrile coating
- Seamless cotton liner
- 300mm (12-in.) long
- Rough grip



## NORMS

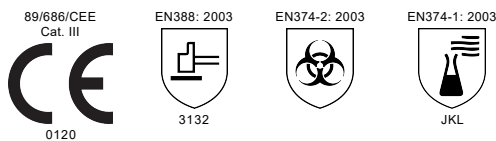

## RECOMMENDED APPLICATIONS

Petrochemical  
Construction  
Chemical

## LINER

Nylon  
Seamless Knit

## COATING

Nitrile

## GRIP

Rough

## COLOR

Blue

## LENGTH

300 mm (12 in.)

## PACKAGING

120 pairs / carton gloves per dispenser  
10 pairs / polybag dispensers per case  
12 polybags / carton gloves per case

## SIZES

7/S  
8/M  
9/L  
10/XL  
11/XXL

## SHOWA

WTC - Tower D  
Strawlinskylaan 757  
1077 XX Amsterdam  
Netherlands

P: +31 (0) 88 004 2102  
E: Info@SHOWAgroup.eu



Technical Services / Analytical Laboratory, Menlo, GA, 30731, U.S.A.

American Society of Testing and Materials F-739 Chemical Permeation Total Immersion Contact

Central European EN 374 Chemical Permeation Total Immersion Contact

**GLOVE** Atlas 720 & 720R

**Description:** Fully Coated, Royal Blue Nitrile, rough grip

<b>CHEMICAL</b>	<b>CAS#</b>	<b>Breakthrough Time in minutes</b>	<b>Test Method</b>
Acetic Acid, 50%	64-19-7	>480	ASTM F739
Hydrochloric Acid, 37%	7647-01-0	>480	ASTM F739
Phenol	108-95-2	119	ASTM F739
Potassium Hydroxide, 99%	1310-58-3	>480	ASTM F739
Sulfuric Acid, 96%	7664-93-9	210	ASTM F739
Gasoline	8006-61-9	4	EN 374
Diesel Fuel	77650-28-3	>480	EN 374

Dan Little

Technical Services/Analytical Manager